


FRONT OPEN SERIES

Suspension

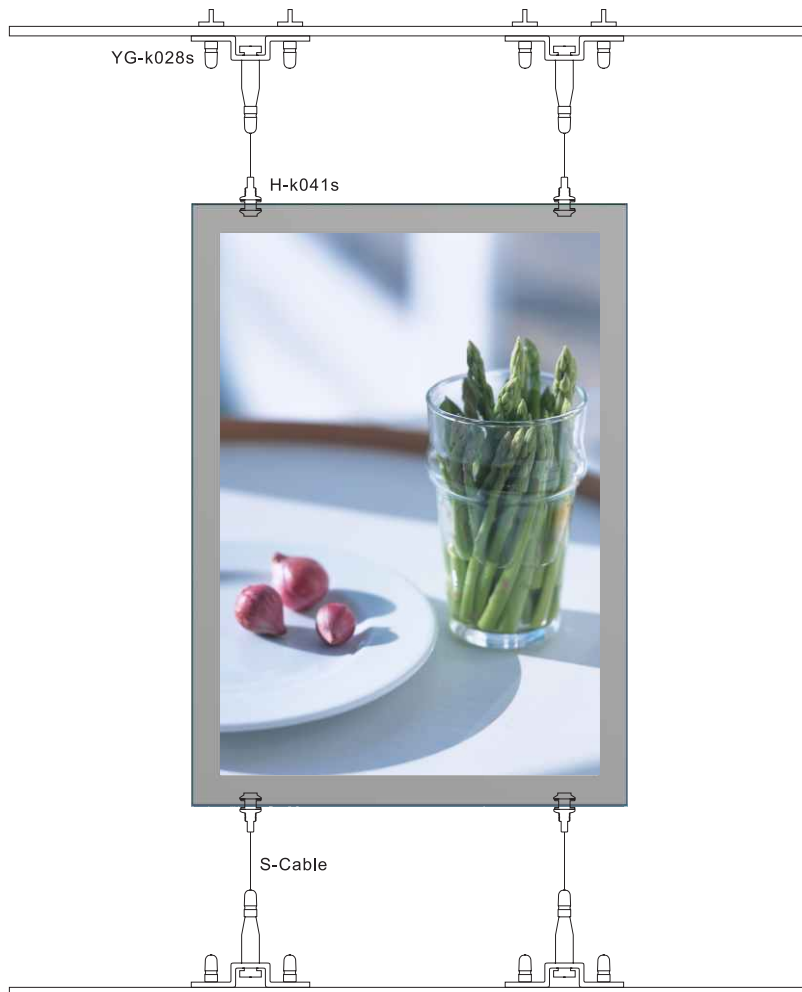

Step 1.

Remove the acrylic faces panel for both sides with suction cap.

Step 2.

Measure the exact distance from the ceiling to the top of the lightbox with 10mm extra.(do the same for the distance from the bottom of the lightbox to the ground)

Step 3.

Cut the supplied stainless cable base on above measurements.

Step 4.

Fix the drop kit YG-k028s base on the ceiling condition, strong structure do require, we recommend fix to steel structure using self drilling screw. Please beware the bolts come with the YG-k028s are only for concrete fixing, do not use on any other materials. The distance between the two ceiling kits should be same as the distance between already fixed H-k041s on the lightbox (do the same for the ground supporting kits YG-k028s, make sure align with the ceiling kits)

Step 5.

Insert both ends of the already cut cables to the YG-k028s and H-k041s for ceiling section first, lock the cables by tighten both caps on the kits (turn clock-direction)

Step 6.

Insert both ends of the already cut cables to the YG-k028s and H-k041s for support section, lock the cables by tighten both caps on the kits (turn clock-direction)

Step 7.

Adjust the position of the lightbox by repeat Step 5 and 6.

Step 8.

Mount the artwork on the inside of the acrylic faces with double sides tape.

Step 9.

Replace the acrylic faces back on the lightbox.